


MODEL: ERUSA-24KH-134A
2-TON 24K BTU/HR ECU
Product Specifications

This ozone-friendly unit is a horizontal, compact air conditioner that boasts a lightweight design that can be wall or floor-mounted. An electric motor allows for continuous operation under varying loads making it an ideal option for use in mobile technical electronics shelters.

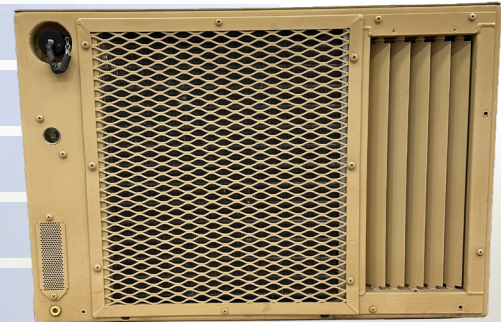

Nominal Heating Capacity:	13,400 BTU/hr
Nominal Cooling Capacity:	24,000 BTU/hr at 60 Hz
Product Dimensions:	30"W x 20"L x 20"H
Product Net Weight:	Max 290-lbs
Power Requirements:	208 VAC, 3-phase, 50/60 Hz


FEATURES

- Operating temperature ranges of -45°C to 26.7°C (-50°F to 80°F) in ambient temperatures of -17.8°C to 52°C (0°F to 125°F).
- Handles for lifting.
- Roll-up canvas condenser cover.
- R-134A Refrigerant.

AVAILABLE OPTIONS

- Test diagnostics measured by electronic metering constantly monitors temperature and pressure and provides fault detection and isolation.
- Electronic rush suppressor to reduce LRA at start up.
- Customer specified color in "carc" paint.
- Customer specific requirements can be accommodated by our design team.
- Prototypes and rapid production samples available upon request.

The appearance of U.S. Department of Defense (DoW) visual information does not imply or constitute DoW endorsement.