


MODEL: S8450-9KH-1
9K BTU/HR ECU
Product Specifications

This is a horizontal compact environmental control unit that boasts a lightweight design ideal for use in mobile technical electronic shelters.

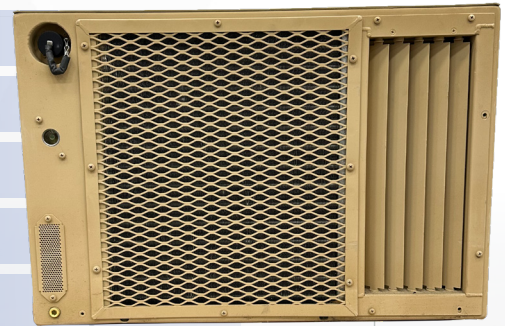

Nominal Heating Capacity:	7,000 BTU/hr
Nominal Cooling Capacity:	10,000 BTU/hr at 60 Hz
Product Dimensions:	24"W x 26"L x 16"H
Product Net Weight:	Max 175-lbs
Power Requirements:	115 VAC, 1-phase, 50/60 Hz


FEATURES

- Operating temperature ranges of -45°C to 26.7°C (-50°F to 80°F) and -17.8°C to 52°C (0°F to 125°F cooling).
- Alternate power input source.
- Handles for lifting.
- R-407C Refrigerant.

AVAILABLE OPTIONS

- Test diagnostics measured by electronic metering constantly monitors temperature and pressure and provides fault detection and isolation.
- Electronic rush suppressor to reduce LRA at start up.
- Customer specified color in "carc" paint.
- Customer specific requirements can be accommodated by our design team.
- Prototypes and rapid production samples available upon request.

The appearance of U.S. Department of Defense (DoW) visual information does not imply or constitute DoW endorsement.